


## 3U-Series 4-in-1 Universal Coupler (3/8" Size)


- U-Series 3/8" couplers are the first 4-in-1, accepting: ARO 310, Industrial, Truflate, and CEJN 410
- Universal couplers have a high concentration of locking balls to reduce incidents of brinelling during operation
- Euro-style valving ensures maximum flow performance and automatic connection with minimal force required
- Couplers have a sleeve-guard 'Lip' to reduce the risk of accidental disconnection while in service
- Seal location allows each nipple to maximise sealing performance at all pressures in a variety of environments

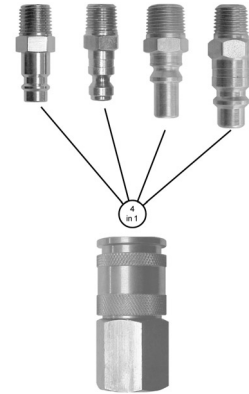

PERFORMANCE SPECIFICATIONS	OPERATING bar (psi)	BURST bar (psi)	FLOW ΔP=0.4 bar (6.9 bar inlet)	LOCKING MECHANISM
3/8"	14 (200)	69 (1,000)	136 CFM	6 Balls

Please Note: Operating and flow specifications are dependent upon the nipple that is inserted into the coupler. The lower performance rating between the coupler or nipple must take precedence.


'3U' COUPLER EQUIVALENT	PARKER	HANSEN	COILHOSE	TOMCO
3/8"	-	-	-	-



(Female Thread)

### U-SERIES 3/8" UNIVERSAL (AUTOMATIC COUPLER)

PART NO.	BODY SIZE	THREAD SIZE	BODY MATERIAL
3UF3-B	3/8"	3/8"-18 NPTF	brass



(Male Thread)

### U-SERIES 3/8" UNIVERSAL (AUTOMATIC COUPLER)

PART NO.	BODY SIZE	THREAD SIZE	BODY MATERIAL
3UM3-B	3/8"	3/8"-18 NPTF	brass



(Standard & Push-Loc Hose Barb)

### U-SERIES 3/8" UNIVERSAL (AUTOMATIC COUPLER)

PART NO.	BODY SIZE	BARB CONFIGURATION	BODY MATERIAL
3US3-B	3/8"	3/8" Hose Barb	brass

Although the Universal coupler permits multiple series nipples to mate with one coupler, it is recommended to match like series couplers and nipples. When using a Universal coupler, the lower performance rating between the coupler and nipple must take precedence.